


U-value

Date: 30.08.2024

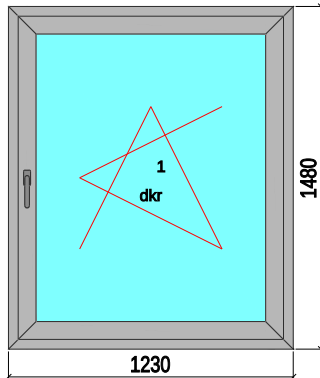

Construction with 1 element, 1230 mm x 1480 mm

[1] 1-part Window

Profile system: IDEAL 8000® / energeto® 8000
 Colour: ap white unlaminated
 Gasket: papyrus-white
 Frame: 180x05 Blendrahmen 80 mm (Reinforcements: 259107)
 Sash: 180x20 Sash 77 mm (Reinforcements: 259022)
 Fitting: 1x Tilt-and-turn right
 Handle: Window Consisting of:
 Fenstergriff
 Infill panel: ClimaGuard Solar (CE) 44mm Ug 0.5 Float, 120633
 Glazing beads Classic-line

Size dependent calculation

[1] Window

Uw	Ug,m	Uf,m	ΣAf	ΣAg	ΣLg	Psig,m
W/(m²K)	W/(m²K)	W/(m²K)	m²	m²	m	W/(mK)
0.76	0.50	1.0	0.59	1.23	4.468	0.040

Standard window calculation

[1] Window

Uw	Ug,m	Uf,m	ΣAf	ΣAg	ΣLg	Psig,m
W/(m²K)	W/(m²K)	W/(m²K)	m²	m²	m	W/(mK)
0.76	0.50	1.0	0.59	1.23	4.468	0.040

